











## Ordering Information

		Shape Code	Recommended Guidewire	Usable Length (cm)
	G7JL35-0-L100	JL3.5	0.035"	100
	G7JL40-0-L100	JL4.0	0.035"	100
	G7JL45-0-L100	JL4.5	0.035"	100
	G7JL50-0-L100	JL5.0	0.035"	100
	G7JL35-0-L100S	JL3.5 ST	0.035"	100
	G7JL40-0-L100S	JL4.0 ST	0.035"	100
	G7JL45-0-L100S	JL4.5 ST	0.035"	100
	G7JL50-0-L100S	JL5.0 ST	0.035"	100
	G7JR35-0-L100	JR3.5	0.035"	100
	G7JR40-0-L100	JR4.0	0.035"	100
	G7JR45-0-L100	JR4.5	0.035"	100
	G7JR50-0-L100	JR5.0	0.035"	100
	G7JR35-0-L100S	JR3.5 ST	0.035"	100
	G7JR40-0-L100S	JR4.0 ST	0.035"	100
	G7JR45-0-L100S	JR4.5 ST	0.035"	100
	G7JR50-0-L100S	JR5.0 ST	0.035"	100
	G7AL07-0-L100	AL0.75	0.035"	100
	G7AL10-0-L100	AL1.0	0.035"	100
	G7AL15-0-L100	AL1.5	0.035"	100
	G7AL20-0-L100	AL2.0	0.035"	100
<b>hort Tip Type</b> 	G7AL07-0-L100S	AL0.75 ST	0.035"	100
	G7AL10-0-L100S	AL1.0 ST	0.035"	100
	G7AL15-0-L100S	AL1.5 ST	0.035"	100
	G7AL20-0-L100S	AL2.0 ST	0.035"	100
<b>Special Curve</b> 	G7SC35-0-L100	SC3.5	0.035"	100
	G7SC40-0-L100	SC4.0	0.035"	100
<b>Hockey Stick</b> 	G7HS00-0-L100	HS	0.035"	100
<b>Power Backup</b> 	G7PB30-0-L100	PB3.0	0.035"	100
	G7PB35-0-L100	PB3.5	0.035"	100
	G7PB40-0-L100	PB4.0	0.035"	100
<b>Super Power Backup</b> 	G7SP30-0-L100	SP3.0	0.035"	100
	G7SP35-0-L100	SP3.5	0.035"	100
	G7SP40-0-L100	SP4.0	0.035"	100

Manufactured by:



ASAHI INTECC CO.,LTD.

<http://www.asahi-intecc.com>

1703 Wakita-cho, Moriyama-ku, Nagoya, Aichi 463-0024 Japan

TEL: +81-52-768-1210 Fax: +81-52-768-1219

ASAHI INTECC CO., LTD. EUROPE  
Strawinskylaan 449  
(WTC Tower C - 4th floor)  
1077 XX Amsterdam,  
The Netherlands  
TEL: +31-(0)20-794-0640  
FAX: +31-(0)20-794-0641

ASAHI INTECC USA, INC.  
2500 Red Hill Avenue, Suite 210  
Santa Ana, California,  
92705, USA  
TEL: +1-949-756-8252  
FAX: +1-949-756-8165

ASAHI INTECC(THAILAND) CO., LTD.  
158/1 Moo5,  
Bangkadi Industrial Park,  
Tiwanon Road, Tambol Bangkadi,  
Amphur Muang,  
Pathumthani 12000,  
Thailand  
TEL: +66-2-501-1302  
FAX: +66-2-501-1305

ASAHI INTECC CO., LTD.  
SINGAPORE REP OFFICE  
3 Bishan Place  
#06-01 Bishan CPF Building  
Singapore S79838  
TEL: +65-6250-4248  
FAX: +65-6250-4247



SheathLess Eaucath/Ver.2/08-07/4000



PTCA GUIDING CATHETER

SheathLess  
Eaucath

# SheathLess Eaucath PTCA Guiding Catheter has been developed for less-invasive treatment and expand the usage of trans-radial approach.

## Thick Outer Layer & Large Inner Lumen


Enhances kink resistance and backup support, yet maintains a large inner lumen for easy insertion of other PCI devices.

## Hydrophilic Coating


Enhances catheter trackability even in tortuous vessels. It also reduces the occurrence of spasms during catheter manipulation.

## 16 Wire Braiding (8 broad wires & 8 thin wires)

The flat wires help to maintain a large lumen. Two different types of braiding patterns provide optimal torqueability and flexibility.

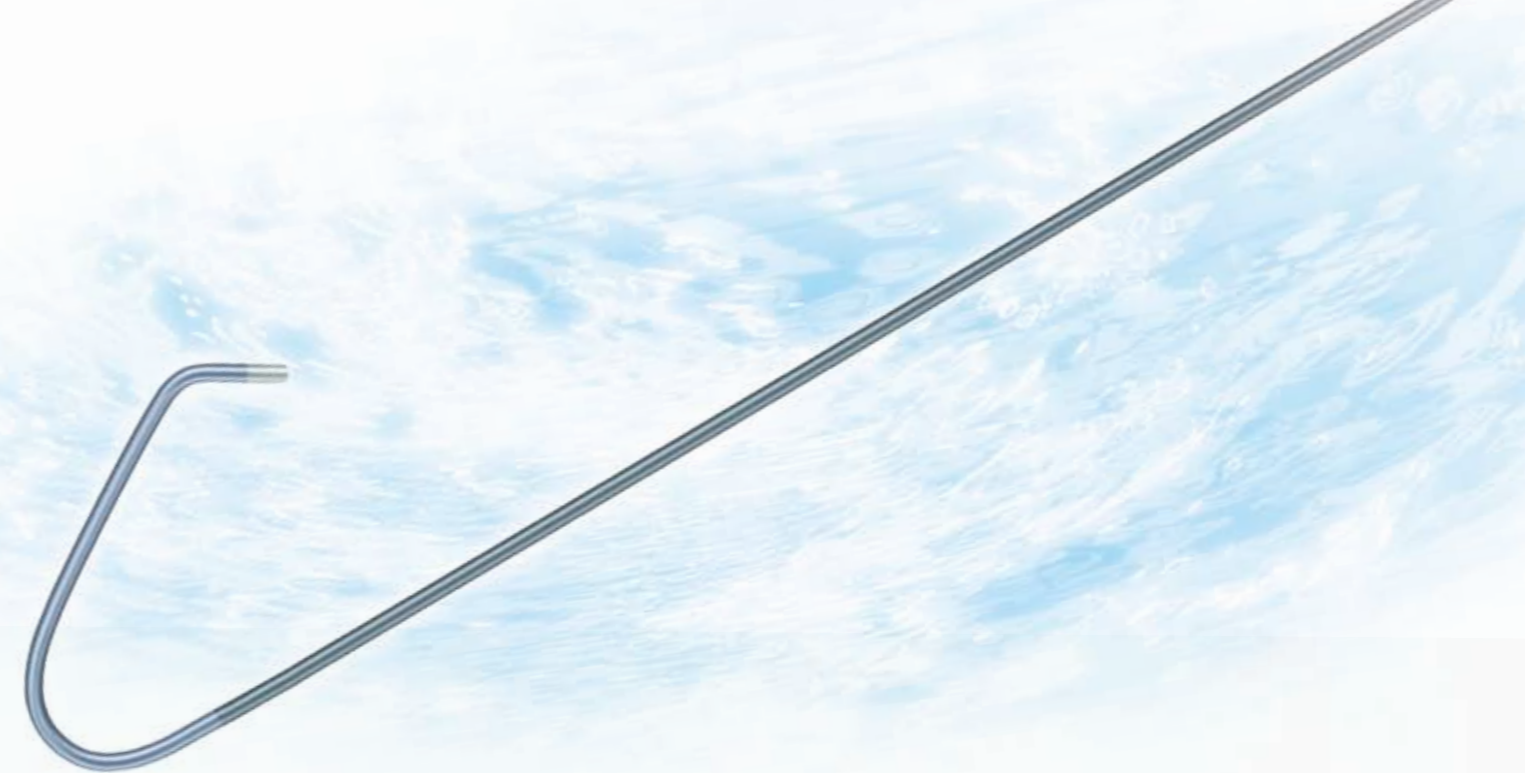

**SheathLess Eaucath is highly recommended for ad-hoc PCI. It enables to perform PCI with a smaller puncture site that realizes minimal invasive treatment.**

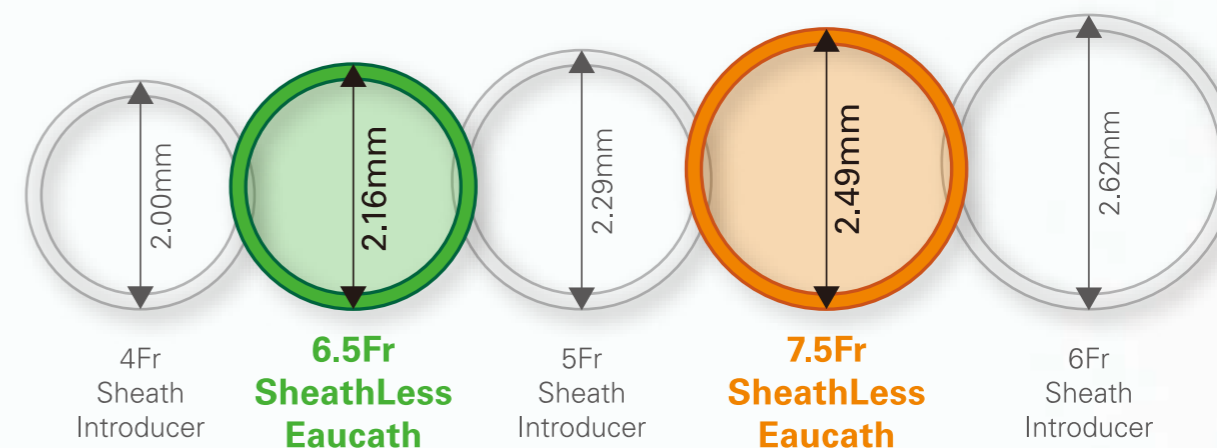

SheathLess Eaucath 6.5Fr possesses about the same size O.D. as a 4Fr sheath introducer and 7.5Fr possesses about the same size O.D. as a 5Fr sheath introducer therefore it enables to perform PCI with a smaller puncture site.

