



STRIDESMOOTH+

Microcatheter

Smooth navigation to distal vessels
with smaller profile microcatheter

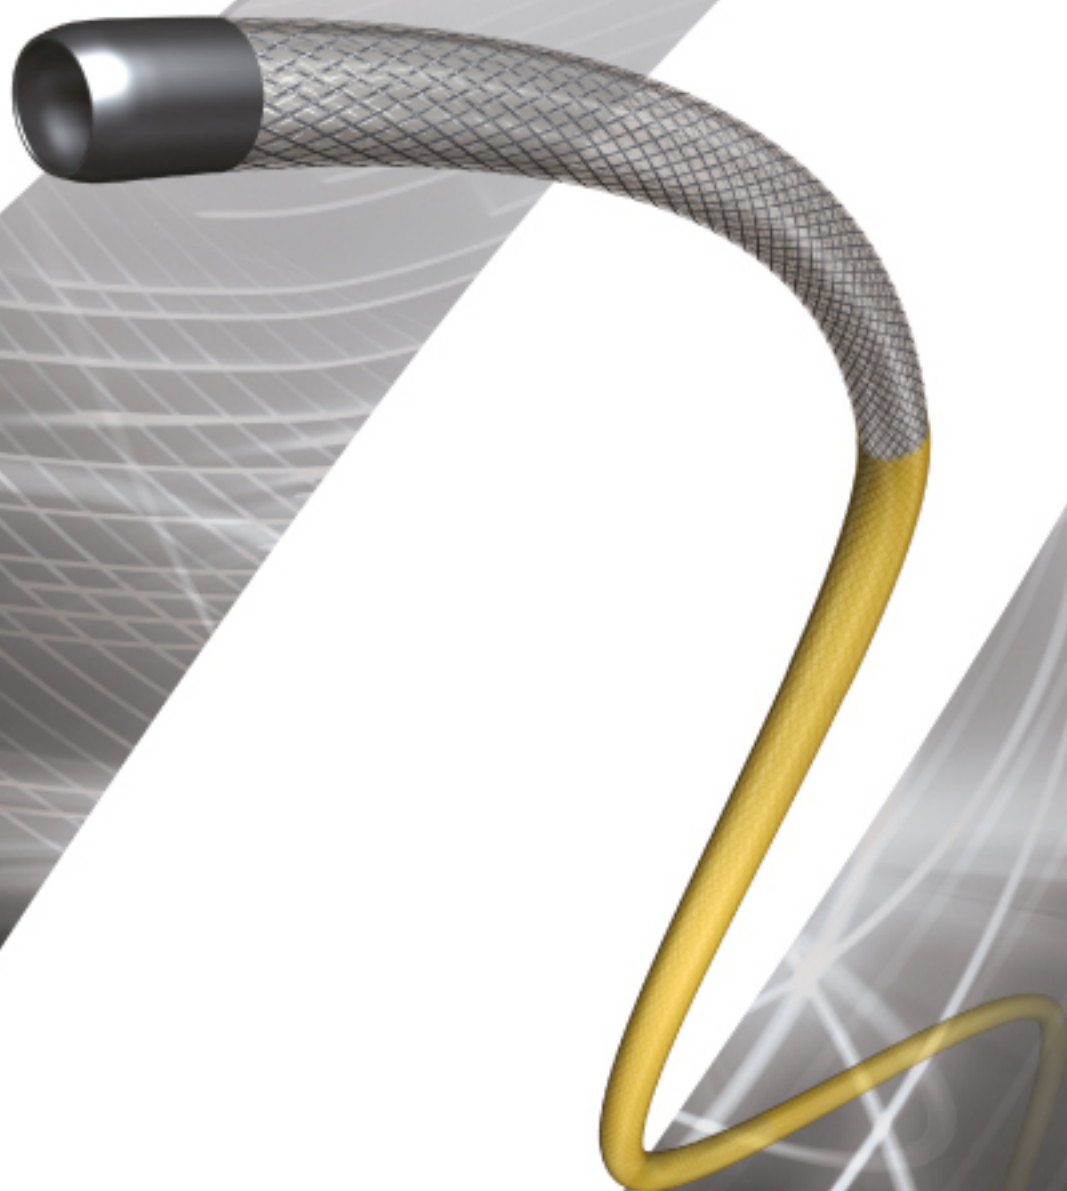


Super selective catheter with 2.0Fr tip

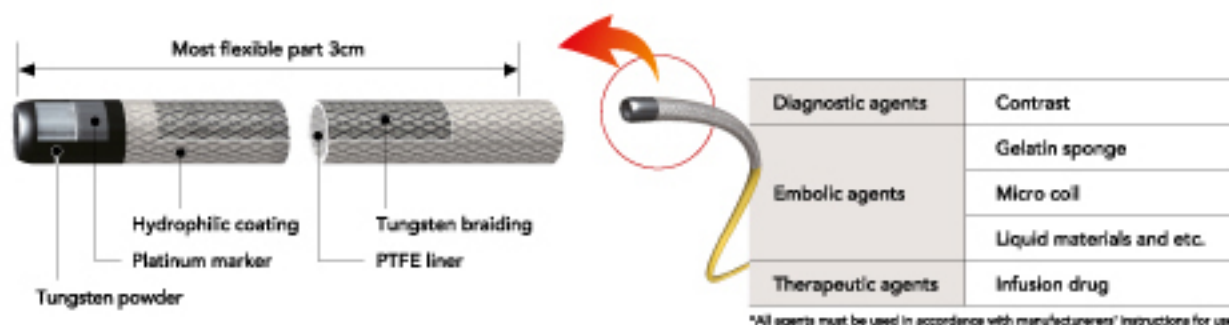

Ordering Information

■ Structure

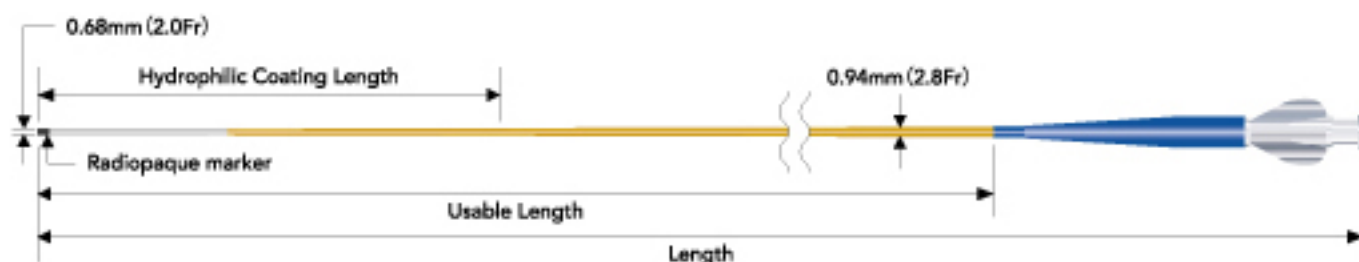

Product	Catalog No.	Usable Length	Length	O.D. of Distal shaft/ O.D. of Proximal shaft	Shaft I.D.	Max. Guide Wire	Hydrophilic Coating Length	Tip shape	Max. Pressure (Dynamic Pressure)
STRIDE SMOOTH+	STP105-20S	105cm	112cm	0.68mm (2.0Fr) 0.94mm (2.8Fr)	0.55mm (0.022inch)	0.46mm (0.018inch)	65cm	Straight	6695kPa (1000psi)
	STP125-20S	125cm	132cm				65cm	Straight	
	STP150-20S	150cm	157cm				100cm	Straight	
	STP125-20A	125cm	132cm				65cm	Angled 45°	