
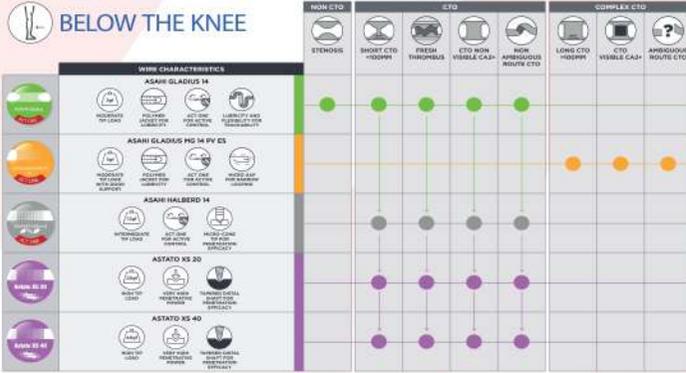


Guide Wire Selection Chart

Peripheral Guide Wire Algorithm

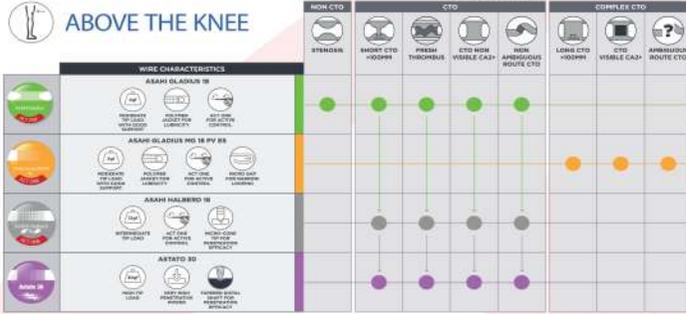

*18(Gladius), *14(Gladius), MG:18(MG Gladius), MG:14(MG Gladius), *20(Halberd), *40(Halberd)

Manufactured by:
ASAHI INTECC
 ASAHI INTECC CO.,LTD.
 5-100 Anabaru-cho, Sakai, Asahi 599-0071 Japan
 TEL:81-674-843501 FAX:81-674-843502
 www.asahi-intecc.com



© 2016 ASAHI INTECC CO., LTD.
 ASAHI, ASAHI, ASAHI Gladius, Treasure and ACT ONE are trademarks or registered trademarks of ASAHI INTECC CO., LTD. in Japan and other countries.
 Some features depicted herein are provided by "Virtual Proguidewire" - www.asahi-intecc.com. "Virtual Pro" is a trademark of ASAHI INTECC CO., LTD.
 036-065-020-61000 AD-1707-DN-V1 (ASAHI Peripheral guide wires, Ver. 1.11_20205_8_1C_20)

Ordering Information

Product	Diameter	Catalog No.	Length	Tip Shape	Composite Guide Wire		
ASAHI Gladius MG14 PV	0.36mm (0.014mm)	PP14R003P	190mm	Pre-shape	ACT ONE		
		PP14R203P	235mm				
		PP14R303P	300mm				
ASAHI Gladius MG14 PV ES	0.36mm (0.014mm)	PP14R004P	190mm	Pre-shape	ACT ONE		
		PP14R204P	235mm				
		PP14R304P	300mm				
ASAHI Gladius MG18 PV ES	0.46mm (0.018mm)	PP18R004P	190mm	Pre-shape	ACT ONE		
		PP18R204P	235mm				
		PP18R304P	300mm				
ASAHI Gladius	0.36mm (0.014mm)	PPW14R100S	200mm	Straight	ACT ONE		
		PPW14R200S	235mm				
	0.36mm (0.014mm)	PPW14R300S	300mm	Pre-shape			
		PPW14R100P	200mm				
	0.45mm (0.018mm)	PPW14R200P	235mm	Straight			
		PPW14R300P	300mm				
	ASAHI Halberd	0.36mm (0.014mm)	PPW18R100S	200mm		Straight	ACT ONE
			PPW18R200S	235mm			
		0.36mm (0.014mm)	PPW18R300S	300mm		Pre-shape	
			PPW18R100P	200mm			
0.45mm (0.018mm)		PPW18R200P	235mm	Straight			
		PPW18R300P	300mm				
ASAHI Gaia PV	0.45mm (0.018mm)	PHW14R201S	235mm	Straight	ACT ONE		
		PHW14R301S	300mm				
	0.45mm (0.018mm)	PHW14R101P	200mm	Pre-shape			
		PHW14R201P	235mm				
	0.45mm (0.018mm)	PHW14R301P	300mm	Straight			
		PHW18R101S	200mm				
Regalis XS 1.0	0.36mm (0.014mm)	PAGP140000	180mm	Pre-shape	-		
		PAGP140300	300mm				
		PAGH143092	190mm				
Astato XS 20	0.36mm (0.014mm)	PAGH143392	300mm	Straight	-		
		PAGHW143094	200mm				
Astato XS 40	0.36mm (0.014mm)	PAGHW143394	300mm	Straight	-		
		PAGH18M071	180mm				
Astato 30	0.45mm (0.018mm)	PAGH18M071	300mm	Straight	-		
		PAGH18M072	190mm				
Treasure Floppy	0.45mm (0.018mm)	PAGH18M072	300mm	Straight	-		
		PAGH18M073	190mm				
Treasure 12	0.45mm (0.018mm)	PAGH18M070	180mm	Straight	-		
		PAGH18M070	300mm				

ASAHI Peripheral Guide Wire

ASAHI's
composite guide wire




Your dreams. Woven together.
ASAHI INTECC


ASAHI INTECC TECHNOLOGY

Exceptional guide wires for precise interventions.

Astato, Regalia and Treasure

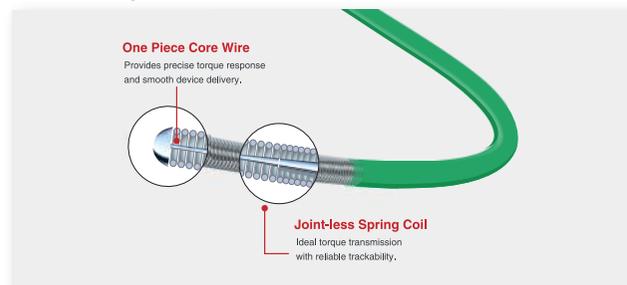

ASAHI Gladius MG PV, ASAHI Gladius, ASAHI Halberd, ASAHI Gaia PV

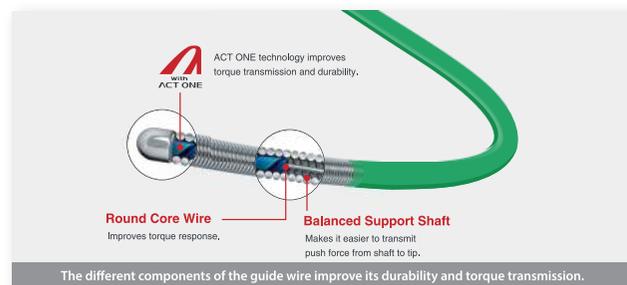

0.018" FRONTLINE

ASAHI Gladius 0.46mm (0.018") Torque control and shaft support for device delivery

	Polymer Jacket	Hydrophilic Coating	
	Tip Load 4 gf		

0.018" COMPLEX CASES

ASAHI Gladius MG 18 PV ES 0.46mm (0.018") Modified distal core with micro gap creates a narrow loop

	Polymer Jacket	Hydrophilic Coating	Micro Gap	
	Tip Load 3 gf			

ASAHI Halberd 0.45mm (0.018") Torque control and penetration efficacy

	Hydrophilic Coating	Uncoated Tip	Micro-cone Tip	
	Tip Load 12 gf			

Astato 30 0.45mm (0.018") Penetration technique for highly calcified occlusions

	Hydrophilic Coating	Uncoated Tip	Tapered	
	Tip Load 30 gf			



0.014" FRONTLINE

ASAHI Gladius 0.36mm (0.014") Torque control, flexibility and lubricity for navigation in tortuous anatomies

	Polymer Jacket	Hydrophilic Coating	
	Tip Load 3 gf		

0.014" COMPLEX CASES

ASAHI Gladius MG 14 PV 0.36mm (0.014") Modified distal core with micro gap creates a narrow loop

	Polymer Jacket	Hydrophilic Coating	Micro Gap	
	Tip Load 3 gf			

ASAHI Gladius MG 14 PV ES 0.36mm (0.014") Modified distal core with micro gap creates a narrow loop

	Polymer Jacket	Hydrophilic Coating	Micro Gap	
	Tip Load 3 gf			

ASAHI Halberd 0.36mm (0.014") Torque control and penetration efficacy

	Hydrophilic Coating	Uncoated Tip	Micro-cone Tip	
	Tip Load 12 gf			

Astato XS 20 0.36mm (0.014") Penetration technique for calcified occlusions

	Hydrophilic Coating	Uncoated Tip	Tapered	
	Tip Load 20 gf			

Astato XS 40 0.36mm (0.014") Penetration technique for calcified occlusions

	Hydrophilic Coating	Uncoated Tip	Tapered	
	Tip Load 40 gf			

Illustration and figures are for reference only.