



Hydrophobic coating
allowing for effortless & durable gliding
properties, no matter if wet or dry.

⦿ Rethink the basics
Passionate about bringing innovative ideas and medical device solutions to life, we are a team building on nearly 20 years of experience in the design and manufacturing of medical device solutions for partners around the world.
Even small changes in product design and quality can make a clear difference – making procedures easier and simpler with better outcomes.
Continually striving for solutions to the most basic problems, we don't go back to basics, we rethink the basics.

Atraumatic tip
designed for smooth and easy insertion.

**Platinum iridium
marker band**
for excellent radiopacity.



Designed for exceptional **⦿**
kink resistant performance
and non-ovaling effect.

2020 Contract Medical International. All rights reserved. DS-0004.07.2020

Distributed by

KARDIA
ASAHI INTECC Group

Kardia Srl
Via Cormons, 18
20151 Milano (MI)
www.kardia.it

CMI ⦿ A product of
Contract Medical International GmbH
Lauensteiner Str. 37
01277 Dresden • Germany
Tel. +49 351 213 88 88
HeraeusMedicalComponents.com

Contract Medical International
joins Heraeus Medical Components
CMI ⦿ | **Heraeus**

DuraSheath
Kink resistant introducer sheath

⦿ Rethink the basics

Supporting complex vascular access

DuraSheath

Kink resistant introducer sheath

From easy insertion to smooth navigation to superb visibility: DuraSheath is designed to combine optimal performance with excellent pushability and trackability.


While maintaining the inner diameter, DuraSheath allows for smooth device passage with an exceptionally small kink radius and non-ovaling effect. The detachable hemostatic valve provides flexibility and versatility, allowing you the ability to focus on the intervention.



New optional shaft material
optimal backup support transitioning to softer distal zone for safe navigation.

Dilator with snap-fit
secures the dilator for safe insertion.

Detachable hemostatic valve
provides you options.

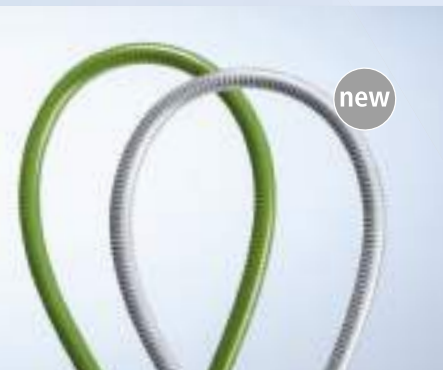

Outer diameter
smooth surface for low friction navigation.

Inner diameter
smooth device delivery and movement.



Shaft versions color coded.

new Optional tip designs




DuraSheath

Technical details / Ordering information

Providing access to target vessel not limited to

- peripheral
- renal
- coronary
- carotid

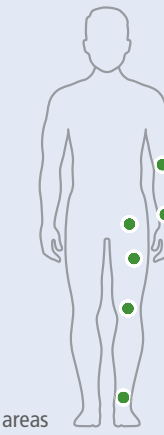


Access all areas

Introducer Sheath

Material – outer	Stainless steel reinforced polymer
Material – inner	PTFE liner
Flexibility	Regular & Firm
Sheath coating	Hydrophobic
Sheath tip	Smooth taper with radiopaque platinum iridium marker band
French size	4, 5, 6, 7, 8 Fr
Length	15, 45, 60, 90, 130 cm
Sidearm/hemostatic valve	Detachable, with color coded 3-way-stopcock

Tip design

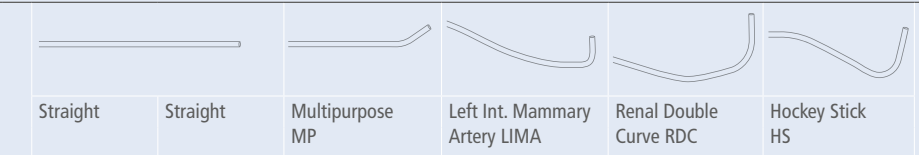

Shaft version	Regular	Firm	Firm	Firm	Firm	Firm	Inner Diameter Min. (mm/inch)	Units/Case
Diam. (Fr)								
Length (cm)								
Catalogue Number								
4 Fr 15 cm	FG-04015						1.60 mm / 0.063"	5
4 Fr 45 cm	FG-04045						1.60 mm / 0.063"	5
4 Fr 60 cm	FG-04060						1.60 mm / 0.063"	5
4 Fr 90 cm	FG-04090						1.60 mm / 0.063"	5
4 Fr 130 cm			FG-04130-F				1.60 mm / 0.063"	5
5 Fr 15 cm	FG-05015						1.92 mm / 0.075"	5
5 Fr 45 cm	FG-05045	FG-05045-F	FG-05045-F-MP	FG-05045-F-LIMA	FG-05045-F-RDC	FG-05045-F-HS	1.92 mm / 0.075"	5
5 Fr 60 cm	FG-05060	FG-05060-F					1.92 mm / 0.075"	5
5 Fr 90 cm	FG-05090	FG-05090-F	FG-05090-F-MP				1.92 mm / 0.075"	5
6 Fr 15 cm	FG-06015	FG-06015-F					2.25 mm / 0.088"	5
6 Fr 45 cm	FG-06045	FG-06045-F	FG-06045-F-MP	FG-06045-F-LIMA	FG-06045-F-RDC	FG-06045-F-HS	2.25 mm / 0.088"	5
6 Fr 60 cm	FG-06060	FG-06060-F					2.25 mm / 0.088"	5
6 Fr 90 cm	FG-06090	FG-06090-F	FG-06090-F-MP				2.25 mm / 0.088"	5
6 Fr 130 cm			FG-06130-F				2.25 mm / 0.088"	5
7 Fr 15 cm	FG-07015						2.55 mm / 0.100"	5
7 Fr 45 cm	FG-07045	FG-07045-F	FG-07045-F-MP	FG-07045-F-LIMA	FG-07045-F-RDC	FG-07045-F-HS	2.55 mm / 0.100"	5
7 Fr 60 cm	FG-07060	FG-07060-F					2.55 mm / 0.100"	5
7 Fr 90 cm	FG-07090	FG-07090-F	FG-07090-F-MP				2.55 mm / 0.100"	5
8 Fr 15 cm	FG-08015						2.88 mm / 0.113"	5
8 Fr 45 cm	FG-08045	FG-08045-F					2.88 mm / 0.113"	5
8 Fr 60 cm	FG-08060	FG-08060-F					2.88 mm / 0.113"	5
8 Fr 90 cm	FG-08090	FG-08090-F					2.88 mm / 0.113"	5

Dilator Guidewire Compatibility

Diameter	4 Fr / 5 Fr / 6 Fr		7 Fr / 8 Fr	
	Length	Length	Length	Length
Dilator Guidewire Comp. max.	15 cm	45 cm / 60 cm / 90 cm / 130 cm	15 cm	45 cm / 60 cm / 90 cm
	0.035" & 0.018"	0.035"	0.035" & 0.018"	0.038"

15 cm versions contain two dilators.